

Posted in | [Signal Processing](#)

Rice Researchers Unveil Multiuser, Multiantenna Transmission Scheme for UHF Spectrum


[Download PDF Copy](#)[Request Quote](#)

Published on September 11, 2014 at 5:49 AM

Written by AZoSensors

Sep 11 2014

Rice University wireless researchers have found a way to make the most of the unused UHF TV spectrum by serving up fat streams of data over wireless hotspots that could stretch for miles.

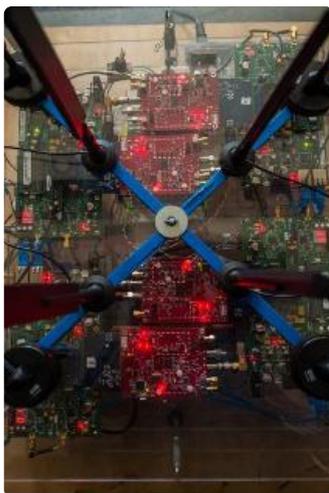

Rice University's Wireless Network Group has created a multiuser, multiantenna transmission scheme for UHF, a portion of the radio spectrum that could be useful for broadband Internet service in rural areas. Credit: Jeff Fitlow/Rice University

In a presentation today at the Association for Computing Machinery's MobiCom 2014 conference in Maui, Hawaii, researchers from Rice's Wireless Network Group will unveil a multiuser, multiantenna transmission scheme for UHF, a portion of the radio spectrum that is traditionally reserved for television broadcasts.

"The holy grail of wireless communications is to go both fast and far," said lead researcher Edward

Knightly, professor and chair of Rice's Department of Electrical and Computer Engineering. "Usually, you can have one or the other but not both. Wireless local area networks today can serve data very fast, but one brick wall and they're done. UHF can travel far, but it hasn't had the high capacity of WiFi.

"This provides the best of both worlds," he said of the new technology.

Rice's technology combines several proven technologies that are already widely used in wireless data transmission. One of these is "multiple-input, multiple-output" (MIMO), a scheme that employs multiple antennae to boost data rates without the need for additional channels or transmitter power. In effect, MIMO allows for a larger wireless "pipeline," and the technology is standard in the latest generation of wireless routers and networking equipment.

Related Stories

- Precision Linear and Rotary Axes for SEM and TEM
- Researchers Create Zinc-MOF Photoluminescence Humidity Sensor
- Network-Independent Data Logging

Parts of the UHF spectrum were opened after the recent switch to digital television, which has a smaller broadcast footprint than analog TV. UHF is often referred to as the "beach front" portion of the wireless spectrum because the signals travel for miles, and one popular idea for the liberated portion of the spectrum is for "open" wireless access points like those used for today's WiFi hotspots. Using UHF for broadband Internet is particularly appealing for rural areas where wired broadband is unavailable.

"When comparing UHF and WiFi, there's usually a tradeoff of capacity for range or vice versa," said Rice graduate student Narendra Anand, the lead author of the new study. "Imagine that the WiFi access point in your home or office sends data down a 100-lane highway, but it's only one mile long. For UHF, the highway is 100 miles long but only three or four lanes wide. And you cannot add any lanes.

"To be able to leverage the best characteristics of the UHF band, we need to be able to efficiently use the lanes that we have," Anand said. "One way to do that is with multiuser MIMO, a multi-antenna transmission technique that serves multiple users over the same channel simultaneously."

Knightly, Anand and Rice graduate student Ryan Guerra designed the first open-source UHF multiuser MIMO test system. Based on Rice's "wireless open-access research platform," or WARP, the system allowed the team to perform a side-by-side comparison of multiuser MIMO for UHF and for both 2.4 gigahertz and 5.8 gigahertz WiFi.

"Based on over-the-air experiments in a range of indoor and outdoor operating environments, we found that UHF-band multiuser MIMO compared favorably and produced high spectral efficiency as well as low-overhead wireless access," Knightly said.

Source: <http://www.rice.edu/>

Download
PDF Copy

Request
Quote

Read in: English

Tell Us What You Think

Do you have a review, update or anything you would like to add to this news story?



Leave your feedback

Login [f](#) [t](#) [g](#) ...

Public Comment Private Feedback to AZoSensors.com

Submit

Latest
interviews

Featured
equipment

Trending
stories

"Materials to Markets" for Flexible Hybrid Electronics

Melissa Grupen-Shemansky



Miniaturised Inertial Sensors with Advanced Temperature Compensation

Fritz Martin



Providing A Full Range of Gas Sensing Solutions

Ray Hicks



Sponsored Content

Room Status Indicators for Early Display of Local Information

From International Gas Detectors Ltd

28 Feb 2018

Temperature Measurement in the Hyperloop

From Micro Epsilon


22 Feb 2018

Specifying a Flow Meter: 10 Common Mistakes


From Titan Enterprises Ltd.

15 Feb 2018


Newsletters you may be interested in



3D Printing
([Preview](#))



ADD / ADHD
([Preview](#))



Advanced Alloys
([Preview](#))

[See all Newsletters »](#)

Other Sites from AZoNetwork

[AZoM](#)

[AZoNano](#)

[AZoRobotics](#)

[AZoCleantech](#)

[AZoOptics](#)

[AZoBuild](#)

[AZoMining](#)

[AZoQuantum](#)

[News Medical](#)

[Life Sciences](#)

Useful Links

[News](#)

[Articles](#)

[Equipment](#)

[Videos](#)

[Directory](#)

[Journals](#)

[Books](#)

[Search](#)

[Become a Member](#)

[Contact](#)

[Help/FAQs](#)

[Advertise](#)

[Terms](#)

[Sitemap](#)

[Courses](#)

[Events](#)

[Applications](#)

[Sensor Types](#)

[Newsletters](#)

[About](#)

[The Team](#)

[back to top](#)





AZoSensors.com - An AZoNetwork Site

This site uses cookies. By continuing to browse the site you are agreeing to our use of cookies. [Find out more.](#)

