

Provided for non-commercial research and education use.  
Not for reproduction, distribution or commercial use.



(This is a sample cover image for this issue. The actual cover is not yet available at this time.)

**This article appeared in a journal published by Elsevier. The attached copy is furnished to the author for internal non-commercial research and education use, including for instruction at the authors institution and sharing with colleagues.**

**Other uses, including reproduction and distribution, or selling or licensing copies, or posting to personal, institutional or third party websites are prohibited.**

**In most cases authors are permitted to post their version of the article (e.g. in Word or Tex form) to their personal website or institutional repository. Authors requiring further information regarding Elsevier's archiving and manuscript policies are encouraged to visit:**

**<http://www.elsevier.com/copyright>**

Contents lists available at [SciVerse ScienceDirect](http://SciVerse.Sciencedirect.com)

## Journal of Contaminant Hydrology

journal homepage: [www.elsevier.com/locate/jconhyd](http://www.elsevier.com/locate/jconhyd)

# Analytical model for BTEX natural attenuation in the presence of fuel ethanol and its anaerobic metabolite acetate

Marcio L.B. da Silva <sup>a,\*</sup>, Diego E. Gomez <sup>b</sup>, Pedro J.J. Alvarez <sup>c</sup><sup>a</sup> EMBRAPA, BR 153 KM 110 P.O. Box 21, Concórdia, SC 89700-000, Brazil<sup>b</sup> College of Engineering, Mathematics and Physical Sciences, University of Exeter, North Park Road, Exeter, EX4 4QF, UK<sup>c</sup> Department of Civil and Environmental Engineering, Rice University, MS-317, 6100 Main St., Houston, TX 77005, USA

## ARTICLE INFO

## Article history:

Received 24 May 2012

Received in revised form 14 December 2012

Accepted 19 December 2012

Available online 30 December 2012

## Keywords:

Acetate

BTEX

Ethanol

Natural attenuation

Modeling

Methane

pH

## ABSTRACT

Flow-through column studies were conducted to mimic the natural attenuation of ethanol and BTEX mixtures, and to consider potential inhibitory effects of ethanol and its anaerobic metabolite acetate on BTEX biodegradation. Results were analyzed using a one-dimensional analytical model that was developed using consecutive reaction differential equations based on first-order kinetics. Decrease in pH due to acetogenesis was also modeled, using charge balance equations under CaCO<sub>3</sub> dissolution conditions. Delay in BTEX removal was observed and simulated in the presence of ethanol and acetate. Acetate was the major volatile fatty acid intermediate produced during anaerobic ethanol biodegradation (accounting for about 58% of the volatile fatty acid mass) as suggested by the model data fit. Acetate accumulation (up to 1.1 g/L) near the source zone contributed to a pH decrease by almost one unit. The anaerobic degradation of ethanol (2 g/L influent concentration) at the source zone produced methane at concentrations exceeding its solubility ( $\approx 26$  mg/L). Overall, this simple analytical model adequately described ethanol degradation, acetate accumulation and methane production patterns, suggesting that it could be used as a screening tool to simulate lag times in BTEX biodegradation, changes in groundwater pH and methane generation following ethanol-blended fuel releases.

© 2012 Elsevier B.V. All rights reserved.

## 1. Introduction

Monoaromatic hydrocarbons such as benzene, toluene, ethylbenzene and the three isomers of xylene (BTEX) are ubiquitous groundwater pollutants commonly associated with releases of petroleum products. Benzene, which can cause leukemia, is the most toxic of the BTEX compounds with an EPA MCL (Maximum Contaminant Level) of 5 ppb (U.S. Environmental Protection Agency, 2009a). Thus, the presence of benzene often dictates the need for remedial action (Alvarez

and Illman, 2006). The impacts of benzene in groundwater aquifers can be minimized by natural attenuation (Alvarez et al., 1991). However, some co-occurring substrates such as ethanol may hinder benzene biodegradation.

The use of ethanol in reformulated gasoline has seen a widespread increase in use throughout the United States to meet the requirements of the Clean Air Act (U.S. Environmental Protection Agency, 2009b) and the Energy Independence and Security Act (United States Congress Senate, 2007), as well as to substitute MTBE (methyl-tert-butyl ether – an oxygenating additive). E10 or E85 (10 and 85% ethanol vol/vol, respectively) are the most common blends currently in use in the United States (Yacobucci, 2007) and amount to 3.4% of the total transportation fuel consumption (U.S. Department of Energy, 2009). This change in energy policy has resulted in increased potential for ethanol to be present in groundwater contaminated with BTEX and other fuel constituents.

\* Corresponding author at: EMBRAPA, BR 153 KM 110 P.O. Box 21, Concórdia, SC 89700-000, Brazil. Tel.: +55 49 3441 0456.

E-mail addresses: [marcio.busi@embrapa.br](mailto:marcio.busi@embrapa.br) (M.L.B. da Silva), [D.E.Gomez@exeter.ac.uk](mailto:D.E.Gomez@exeter.ac.uk) (D.E. Gomez), [alvarez@rice.edu](mailto:alvarez@rice.edu) (P.J.J. Alvarez).

Ethanol and its biodegradation products (e.g., acetate) can hinder BTEX biodegradation by multiple mechanisms, including the accelerated depletion of electron acceptors (Cápiro et al., 2007; Corseuil et al., 1998; Da Silva and Alvarez, 2002) that could otherwise be available for BTEX bio-oxidation. The preferential degradation of these compounds (or other common substrates that are degraded through central metabolic pathways) appears to be related to catabolite repression and metabolic flux dilution, which hinder the rate of BTEX degradation per unit cell (Da Silva and Alvarez, 2010; Lovanh and Alvarez, 2004; Lovanh et al., 2002). Acetate accumulation during the anaerobic degradation of ethanol can also make the fermentative biodegradation of BTEX endergonic, thus hindering the thermodynamic feasibility of anaerobic natural attenuation (Corseuil et al., 2011). Therefore the presence of ethanol and ethanol-derived acetate in groundwater can contribute to longer BTEX plumes (Corseuil et al., 2011; Ruiz-Aguilar et al., 2002) increasing the risk of human exposure (Powers et al., 2001b). These observations have been corroborated by laboratory studies (Cápiro et al., 2007, 2008; Corseuil et al., 1998; Da Silva and Alvarez, 2002), field research (Corseuil et al., 2011; Ruiz-Aguilar et al., 2002) and modeling studies (Gomez and Alvarez, 2009, 2010; Gomez et al., 2008; Heermann and Powers, 1998; Mcnab et al., 1999; Molson et al., 2002). Nevertheless, the intensity of these effects can be system specific, which underscores the need for simple models that facilitate preliminary risk assessment and evaluate the potential performance of natural attenuation.

In this paper, a simple one-dimensional fate and transport analytical model was developed to provide a natural attenuation screening tool that considers the inhibitory effects of ethanol and acetate on biodegradation. Flow-through aquifer columns simulating ethanol and BTEX natural attenuation were used to validate the model. Our approach is similar to the convective-dispersive transport model presented by Van Genuchten (1985) to describe sequential first order decay reactions for radionuclide and nitrification. We advance that work by simulating different processes of emerging relevance: (1) inhibition of BTEX biodegradation (increased lag time) by the presence of ethanol and its byproduct acetate; (2) methane formation from ethanol blend releases, which is important to assess explosion risk; and (3) pH decrease due to volatile fatty acids (VFA) accumulation, which could be an important stressor that hinders natural attenuation.

## 2. Material and methods

### 2.1. Aquifer columns experiments

Three large glass columns (120-cm long, 5-cm diameter) were used to investigate natural attenuation of benzene, toluene, ethylbenzene, *o*-*m*-*p*-xylenes (BTEX) and ethanol, and their potential interactive effects (Da Silva and Alvarez, 2002). The columns were equipped with eight sampling ports (at 2.5, 7.6, 14, 20, 40, 60, 80, and 100 cm from the inlet), and packed with a non-contaminated aquifer material collected from the Northwest Terminal in Tigard, Oregon. Soil pH was 5.1, buffer index of 6.6 and organic matter of 1.2%.

Hydraulic characteristics of the experimental columns were determined using bromide tracer studies. Hydraulic parameters were estimated by fitting bromide tracer data to

the one-dimensional (1-D) advection-dispersion equation (Domenico and Schwartz, 1997):

$$C = \left(\frac{C_o}{2}\right) \operatorname{erfc} \left[ \frac{\left(R_f x - \left(\frac{Q}{A\eta_e}\right)t\right)}{2\sqrt{DR_f t}} \right] + \exp \left[ \frac{\left(\frac{Q}{A\eta_e}\right)x}{D} \right] \operatorname{erfc} \left[ \frac{\left(R_f x + \left(\frac{Q}{A\eta_e}\right)t\right)}{2\sqrt{DR_f t}} \right] \quad (1)$$

where  $C$  = effluent concentration;  $C_o$  = influent concentration;  $x$  = column inlet distance;  $t$  = elapsed time;  $Q$  = flow rate (6.7 to 7.4 mL h<sup>-1</sup>);  $A$  = cross sectional area;  $\eta_e$  = effective porosity (0.37);  $D$  = dispersion coefficient (5 cm<sup>2</sup> h<sup>-1</sup>);  $R_f$  = retardation factor ( $R_f=1$  for bromide) and  $\operatorname{erfc}$  = complementary error function. Approximately six days were required to displace one pore volume.


One column was fed BTEX at 10 mg L<sup>-1</sup> total, to provide a baseline for the effect of ethanol on BTEX attenuation. A second column was fed BTEX plus ethanol (initially 2 g L<sup>-1</sup>, then 1 g/L at the end of the experiments). A third, sterile control column was run to distinguish biodegradation from potential abiotic losses (negative control). Sterile conditions were maintained by poisoning the synthetic groundwater with Kathon biocide (CG/ICP 23–25%; Sigma, St. Louis, MO) and later fed BTEX plus ethanol (2 g L<sup>-1</sup>). Each of the columns was fed continuously with a carbonate-buffered synthetic groundwater with the following composition was (mg/L): nitrate (30); sulfate (150); carbonate (as CaCO<sub>3</sub>) (1000); Mg<sup>2+</sup> (1.5); PO<sub>4</sub><sup>3-</sup> (0.06); Ni(II), Cu(II), Zn(II), Co(II), and Mo(IV) (0.002 each) (von Gunten and Zobrist, 1993). This solution was and purged with 5% CO<sub>2</sub>/95% air prior to entering the columns. All columns were operated in the dark at 22 °C and fed continuously. A peristaltic pump (Masterflex Mod. 7519-15) was used to feed the mineral medium and a syringe pump (Harvard Apparatus Mod. 22) was used to feed the volatile organic compounds (i.e., BTEX and ethanol). The ratio of the peristaltic to syringe pump rates was set at 1:20.

Aqueous (1 mL) samples from the influent and side ports were collected with gas-tight syringes (Hamilton Co., Reno, Nev.). BTEX, ethanol and methane were analyzed using an HP 5890 gas chromatograph, as described by Alvarez et al. (1998). Bromide and acetate were analyzed in an Alcott 728 autosampler coupled to ion chromatograph interfaced to a conductivity detector (Dionex Inc., Sunnyvale, CA). The pH of the samples was measured using a Fisher Scientific AB15 pH meter.

### 2.2. Simulating acetogenesis and methanogenesis

An analytical model was developed to track ethanol degradation and the formation of its metabolites: acetate and methane. Predicting acetate and volatile-fatty acid-derived methane accumulation is relevant because: a) acetic acid produced during the fermentation of organic compounds can accumulate transiently in methanogenic environments and inhibit BTEX biodegradation (Cozzarelli et al., 1994; Corseuil et al., 2011) and b) methane formation and accumulation in confined aquifers can pose a potential explosion hazard

(Coward and Jones, 1931; Jones and Agostino, 1998; Marrin, 1989) and/or serve as substrate for methanotrophic activity, thus consuming oxygen and enhancing benzene vapor intrusion pathways through the vadose zone (Ma et al., 2012). Furthermore, studies by Jewell and Wilson (2011) show that methane in soil gas has the potential to form flammable mixtures under sufficient aerobic conditions. Ethanol degradation, with the resulting acetate and methane production, was simulated using consecutive reaction differential equations (Schnoor, 1996) based on the following stoichiometry reactions (Powers et al., 2001a):



The following three differential equations, representing the rate of change of the concentration of species associated with specific degradation pathways, were used in the model:

$$d \frac{[\text{EtOH}]}{dt} = -k_1[\text{EtOH}] \quad \text{Ethanol (EtOH) degradation rate} \quad (4)$$

$$d \frac{[\text{HAc}]}{dt} = +k_1[\text{EtOH}] - k_2[\text{HAc}] \quad \text{Acetate (HAc) formation rate} \quad (5)$$

$$d \frac{[\text{CH}_4]}{dt} = +k_2[\text{HAc}] \quad \text{Methane (CH}_4\text{) formation rate} \quad (6)$$

where  $t$  is the travel time (distance/seepage velocity). The solution for the third species (i.e. methane) was obtained by using the mass balance principle:

$$[\text{Total}] = [\text{EtOH}] + [\text{HAc}] + [\text{CH}_4] \quad (7)$$

where  $[\text{Total}]$  is the total moles of species. Finally, the solution for the third species (methane) was:

$$[\text{CH}_4] = [\text{Total}] - [\text{EtOH}]e^{-k_1 t} - [\text{HAc}]e^{-k_2 t} - \left[ \left( \frac{[\text{EtOH}]}{k_2 - k_1} \right) k_1 (e^{-k_1 t} - e^{-k_2 t}) \right] \quad (8)$$

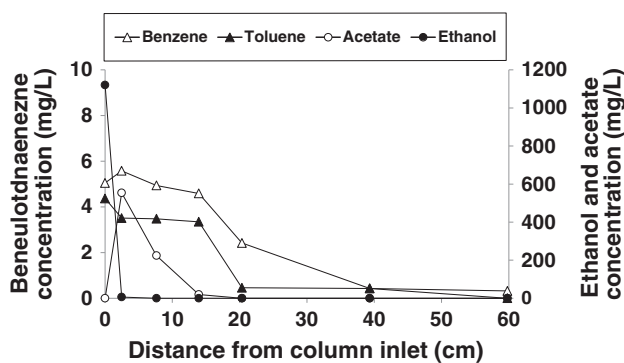


Fig. 1. Measured ethanol, acetate, benzene and toluene concentrations profile. Significant benzene and toluene biodegradation occurred only after complete ethanol or acetate removal. Influent ethanol concentration was reduced from 2 to  $1 \text{ g L}^{-1}$  in this experiment to minimize acetate accumulation and demonstrate benzene and toluene degradation. Adapted from Da Silva and Alvarez (2004).

The rate constants for ethanol degradation and methane production were estimated from concentration profiles along the column length, as the slope of natural logarithm ( $\ln$ ) of concentration versus travel time [i.e., distance/pore velocity ( $x/v$ )] (Fig. 1). The rate constants obtained for acetogens ( $k_1$ ) and methanogens ( $k_2$ ) were  $0.205 \pm 0.009 \text{ h}^{-1}$  and  $0.023 \pm 0.014 \text{ h}^{-1}$ , respectively. These values are in accordance with typical ethanol degradation rates under methanogenic conditions ( $0.02\text{--}0.1 \text{ d}^{-1}$ ) (Adair et al., 2003). Water-phase methane was calculated by Eq. (8) corrected for the stoichiometry of ethanol degradation and Henry's coefficient ( $K_H = 680 \text{ atm}\cdot\text{L}/\text{mol}$  at  $25^\circ\text{C}$ ) (Metcalf and Eddy, 1991).

### 2.3. Simulating changes in groundwater pH

The accumulation of volatile fatty acids can decrease soil buffering capacity and contribute to lower groundwater pH values that can ultimately affect the biodegradation of target compounds. Changes in groundwater pH in the column system were simulated based on the dissolution of  $\text{CaCO}_{3(s)}$ , used as a natural buffer. Conditions within the columns were assumed as an open system with no calcium complexation and ionic strength effects at temperature of  $25^\circ\text{C}$  (Snoeyink and Jenkins, 1980).

At equilibrium with the atmosphere:

$$[\text{H}_2\text{CO}_3^*] = K_H P_{\text{CO}_2} \quad (9)$$

where  $[\text{H}_2\text{CO}_3^*]$  is the carbonic acid concentration (mainly dissolved  $\text{CO}_2$ ) as predicted by Henry's law ( $[\text{H}_2\text{CO}_3^*] = K_H \times P_{\text{CO}_2}$ , with  $K_H = 10^{-1.5} \text{ mol/L}\cdot\text{atm}$  at  $25^\circ\text{C}$ ). A typical  $P_{\text{CO}_2}$  value for limestone strata-groundwater systems ( $10^{-2} \text{ atm}$ ) was used (Snoeyink and Jenkins, 1980). Since soil microbial activity evolves significant  $\text{CO}_2$ , a higher  $P_{\text{CO}_2}$  value ( $10^{-1} \text{ atm}$ ) was assumed for locations with high ethanol biodegradation activity (2.5 to 20 cm from the column inlet).

The mass balance is:

$$[\text{Ca}] = [\text{Ca}^{2+}] \quad (10)$$

$$[\text{C}_T, \text{CO}_3] = [\text{H}_2\text{CO}_3^*] + [\text{HCO}_3^-] + [\text{CO}_3^{2-}] \quad (11)$$

$$[\text{C}_T, \text{HAc}^-] = [\text{H}^+] + [\text{Ac}^-] \quad (12)$$

where  $\text{C}_T, \text{CO}_3$  is the concentration of total inorganic carbon species and  $\text{C}_T, \text{HAc}^-$  is the total acid acetic plus acetate concentration.


The charge balance is:

$$2[\text{Ca}^{2+}] + [\text{H}^+] = [\text{OH}^-] + [\text{HCO}_3^-] + 2[\text{CO}_3^{2-}] + [\text{HAc}^-] \quad (13)$$

From Eq. (11) and using  $\alpha$ :

$$[\text{H}_2\text{CO}_3^*] = [10^{-3.5}] = \alpha_0 \text{C}_T, \text{CO}_3 \quad (14)$$

From the calcite solubility reaction:



$$[\text{Ca}^{2+}][\text{CO}_3^{2-}] = K_{\text{SO}} = 10^{-8.3} \quad (16)$$



$$[Ca^{2+}] = \frac{K_{SO}}{CO_3^{2-}} = \frac{K_{SO}}{(\alpha_2 C_T, CO_3)}. \quad (17)$$

Substituting  $10^{-5}/\alpha_0$  for  $C_T, CO_3$ :

$$[Ca^{2+}] = \frac{K_{SO}\alpha_0}{(\alpha_2 10^{-5})}. \quad (18)$$

Substituting into Eq. (13) yields:

$$\frac{2\alpha_0 K_{SO}}{(10^{-5}\alpha_2 + [H^+])} = \frac{K_W}{\left[ [H^+] + \alpha_1 \left( \frac{10^{-5}}{\alpha_0} \right) + 2\alpha_2 \left( \frac{10^{-5}}{\alpha_0} \right) \right] + \alpha_1 [C_T, Ac^-]} \quad (19)$$

where:

$$K_W = [H^+][OH^-] = 10^{-14} \quad (20)$$

$$\alpha_0 = \frac{[H^+]}{E} = \frac{[H_2CO_3^*]}{C_T, CO_3} \quad (21)$$

$$\alpha_1 = \frac{[H^+]Ka_1}{E} = \frac{[HCO_3^-]}{C_T, CO_3} \quad (22)$$

$$\alpha_2 = \frac{Ka_1Ka_2}{E} = \frac{[CO_3^{2-}]}{C_T, CO_3} \quad (23)$$

$$Ka_1 = 10^{-6.3}; Ka_2 = 10^{-10.3}; E = [H^+]^2 + [H^+]Ka_1 + Ka_1Ka_2 \quad (24)$$

$$\alpha_1 = \frac{Ka_1}{[H^+] + Ka_1} = \frac{[Ac^-]}{C_T, HAC} \quad (25)$$

$$Ka_1 = 10^{-4.7}. \quad (26)$$

Therefore, the only unknown in the charge balance (Eq. (13)) is  $[H^+]$ , which was determined using iterative methods to correspond to a pH of 7.3.

#### 2.4. Analytical model limitations

The mathematical model presented in this manuscript was developed using an EXCEL spreadsheet using equations for ethanol degradation and byproducts formation (i.e., acetate and methane, reactions 4 to 8). The model represents a fast and simple tool for tracking acetate and methane, which are relevant to understand BTEX plume dynamics in sites impacted by ethanol-blend releases. The model output response to uncertainty (within 25% from the median) was evaluated by performing Monte Carlo simulations (Fig. 4). Random simulations (100 for each parameter ( $k_1$ [EtOH] and  $k_2$ [HAc])) were performed.

Although the analytical solution presented is fast and accurate, it has several limitations: (1) the analytical model considers a 1D contaminant plume with a continuous source of ethanol, and an acclimated microbial biomass. Acclimation time and changes in microbial populations can have a significant impact on degradation rates and is an important consideration when comparing field and modeling data, although in our case

the simulations adequately characterized system behavior (Fig. 3). (2) The model was simplified to ignore methane oxidation by methanotrophs that consume  $O_2$ . This can lead to an overestimation of methane present in the system. However, this error is expected to be small relative to model outputs, as methanotrophic activity is expected to be low within the anaerobic core of the plume. (3) The model uses an analytical solution instead of a computationally intensive numerical method. Although less flexible in regards to domain characteristics and heterogeneity is not considered, an analytical solution provides a fast and easy-to-use screening tool for the region of influence of ethanol and acetate. This information can be used to estimate the region where BTEX degradation is potentially hindered by the presence of ethanol or acetate at relatively high concentrations. (4) The model does not consider BTEX degradation kinetics directly. This simplifies the system of equations and facilitates obtaining a fast and accurate closed form solution. As a system of equations gets larger and model domain more complex, analytical solutions become less appropriate and harder to derive compared to numerical methods. (5) The model does not explicitly incorporate microbial growth or changes in microbial community structure; the analytical solution considers only first-order degradation rates for ethanol and acetate and methane generation rate, as shown in Eqs. (4)–(7).

As is the case with most analytical models, one must fully justify that modeling assumptions accurately reflect site conditions, that site-specific data used in modeling are valid, and that literature values abstracted for input are realistic and applicable. Without such detailed justification, the accuracy of the simulations cannot be guaranteed.

### 3. Results and discussion

BTEX and ethanol volatilization losses in sterile (control) columns were minor (<8%; data not shown), indicating that biodegradation was the main contaminant removal and natural attenuation mechanism (Da Silva and Alvarez, 2002). Ethanol was preferentially degraded within 3 cm of the column inlet (Fig. 1). These results corroborate previous reports that ethanol can be degraded faster than other gasoline constituents (Cápiro et al., 2007; Corseuil et al., 1998, 2011; Da Silva and Alvarez, 2002). The biodegradation of ethanol led to the formation and accumulation of acetate (Fig. 1). Although not toxic, the presence of acetate as low as 0.3 mM (Rakoczy et al., 2011) could hinder the thermodynamic feasibility of BTEX degradation by syntrophic microorganisms typically associated with sulfate-reducing and methanogenic conditions (Ulrich and Edwards, 2003). Benzene and toluene degradation in our column experiments only occurred after the onset of acetate removal (Fig. 1). Such inhibitory effects on BTEX biodegradation were previously demonstrated to also occur during the natural attenuation of BTEX and ethanol mixtures at field scale (Corseuil et al., 2011). Thus, estimating ethanol and acetate remediation time for gasohol contaminated sites is particularly important to predict BTEX natural attenuation lag and plume length, as significant BTEX biodegradation typically occurs after most of the ethanol and acetate have been depleted (Corseuil et al., 2011; Da Silva and Alvarez, 2002, 2004).

We developed a simple model to simulate the natural attenuation of ethanol-BTEX mixtures and facilitate preliminary

risk assessment. First-order degradation rate constants obtained for ethanol from our column experiments ( $0.19 \pm 0.008 \text{ d}^{-1}$ ) (Fig. 2) were within the typical values observed in the field  $0.02\text{--}0.1 \text{ d}^{-1}$  (Adair et al., 2003). It was considered that ethanol-derived acetate served as the dominant substrate for methanogens and that acetate produced from propionate or butyrate degradation was immediately consumed by methanogens (Oztürk, 1991). Thus, whereas other VFAs besides acetate [i.e., propionate (Wu and Hickey, 1996; Wu et al., 1991), formate (Wu et al., 1991) and/or butyrate (Freitas et al., 2010)] could also be produced during anaerobic ethanol biodegradation, their production was not considered in this modeling effort for simplicity. Acetate accounted for approximately 58% of the total VFA produced as suggested by adjusting model fitting with the measured data ( $R^2 = 0.84$ ) (Fig. 3) and Monte Carlo analysis (Fig. 4). This estimate is consistent with previous studies that showed approximately 50:50 (acetate:butyrate) production during anaerobic ethanol biodegradation in groundwater (Ma et al., 2011).

Acetogenesis during ethanol and BTEX degradation decreased the pH of the system by about 1 unit (7.3 to 6.4) even though the medium was well buffered with calcium carbonate ( $\text{CaCO}_3 = 1 \text{ g L}^{-1}$ ) (Fig. 5). The model suggests that poorly buffered systems could experience a larger drop in pH, with the potential to affect bacterial metabolism and hinder the activity of ethanol and/or BTEX degraders. Simulation of ethanol-derived acetate accumulation can also help discern potential corrosive conditions in impacted subsurface infrastructures (Duncan et al., 2009; Sufliya et al., 2008).

Ethanol-derived acetate served as substrate for methanogenesis, and methane accumulation was relatively well predicted in these aquifer columns using Eqs. (2) to (8). The maximum methane concentration in the water phase was

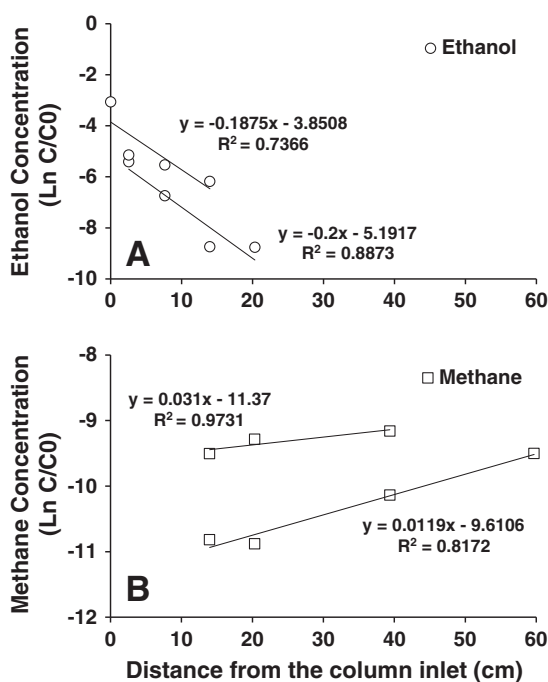


Fig. 2. In of ethanol concentration ( $C/C_0$ ) versus distance (A). The slope multiplied by the pore velocity is  $k_1$ . In of methane concentration ( $C/C_0$ ) versus distance (B). The slope multiplied by the pore velocity is  $k_2$ .

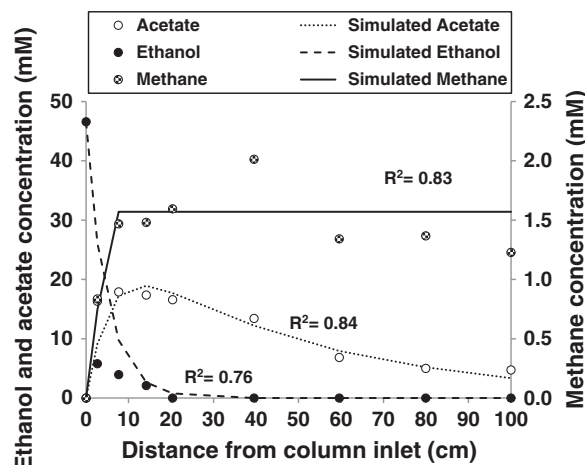


Fig. 3. Ethanol degradation, acetate and methane production profiles in the column fed BTEX and ethanol after 550 days of operation. Dotted lines denote simulation curves determined by Eqs. (2) to (10). Solid line represents methane model.

close to its solubility limit of  $0.09 \text{ mM}$ . For  $43 \text{ mM}$  ( $\sim 2 \text{ g L}^{-1}$ ) of ethanol added, an expected  $65 \text{ mM}$  ( $1.04 \text{ g L}^{-1}$ ) of total methane would be produced according to the theoretical stoichiometry (Fig. 4). Because the columns are effectively an open system, the maximum water-fraction methane concentration should not exceed  $1.6 \text{ mM}$  (or  $26 \text{ mg L}^{-1}$  at  $20 \text{ }^\circ\text{C}$  and  $1 \text{ atm}$ ) (Metcalf and Eddy, 1991) as shown by the plateau in simulated methane concentration unless there was an unexpected increase in the system pressure (e.g., clogging). Thus, an increase in the system pressure would raise the dissolved-methane concentration as determined by the partial pressure law for gases (i.e.,  $PV = nRT$  where  $P = 1 \text{ atm}$ ,  $V = \text{volume (L)}$ ,  $R = 0.082 \text{ atm L (mole K)}^{-1}$ ,  $n = \text{methane concentration (M)}$ , and  $T = 293 \text{ K}$ ). For example, considering the column void volume of  $872 \text{ mL}$  [i.e.,  $2356 \text{ mL total volume} \times 0.37 \text{ effective porosity } (\eta_e)$ ], and the theoretical methane accumulation ( $65 \text{ mM}$  or  $1.04 \text{ g L}^{-1}$ ), the actual pressure inside the column would be equal to  $1.63 \text{ atm}$  (at  $20 \text{ }^\circ\text{C}$ ). The resulting  $9.3 \text{ pound per square inch (psi)}$  pressure above atmospheric pressure of  $14.7 \text{ psi}$  ( $1 \text{ atm}$ ) suggests that methane accumulation has the

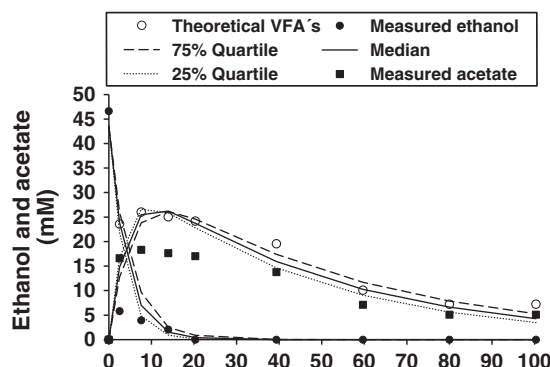
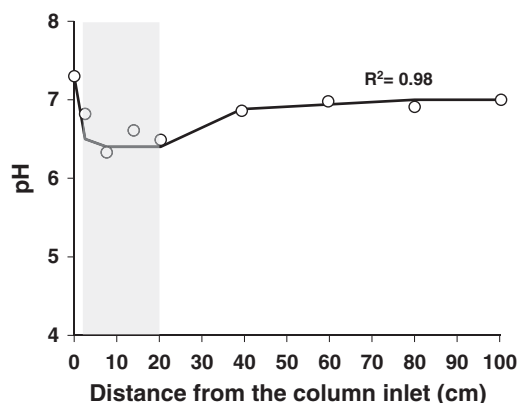


Fig. 4. Ethanol, acetate and theoretical total volatile fatty acids (VFAs) concentration profile in the column fed BTEX and ethanol after 153 days of operation. Lines denote simulation curves determined by Eqs. (2) to (10), and Monte Carlo analyses.



**Fig. 5.** pH profile in the column fed ethanol after 550 days of operation. Solid line denotes pH simulation curve. Shaded box represents locations where high ethanol and its metabolites biodegradation contributed to higher microbial activity and increased  $\text{PCO}_2$  ( $10^{-1}$  atm).

potential to pose an explosion hazard if it migrates into enclosed spaces where ignitable conditions exist [i.e., the lower explosion limit (LEL) of methane in air is about 5% v/v (Jewell and Wilson, 2011)].

#### 4. Conclusions

The analytical models presented in this work predicted accurately ethanol degradation, acetate formation and consumption, and methane generation in flow-through aquifer columns simulating natural attenuation of a continuous release of ethanol-blended fuel. Changes in groundwater pH were also satisfactorily simulated by considering ethanol-derived acetate accumulation and  $\text{PCO}_2$  increase linked to biological activities stimulated by ethanol. Future development of the model is necessary to improve its capabilities. This includes: a) consideration of BTEX degradation kinetics and fate; b) model validation based on total ethanol-derived volatile fatty acids (and not just acetate); c) validation of the groundwater pH changes based on measured VFAs and  $\text{PCO}_2$  concentrations; d) changes in methane accumulation rates based on the presence and activity of methanotrophs, and e) evaluation of the explosion potential associated with methane accumulation. Even at this early stage of development, however, the presented analytical model is relevant to guide future research, as foundation for more advanced computational models; and as a preliminary screening tool for risk assessment and characterization of sites impacted by ethanol blend releases.

#### Acknowledgments

We would like to thank Prof. Jerald L. Schnoor at The University of Iowa for his valuable advice on model development.

#### References

Adair, C.J., Kolhatkar, R., Wilson, J.T., 2003. Kinetics of ethanol biodegradation under methanogenic conditions in gasoline spills. Record Report 63096 presented at 2003 NGWA Conference on MTBE, Baltimore, MD, June 4–6. Alvarez, P.J.J., Illman, W.A., 2006. Bioremediation and Natural Attenuation: Process Fundamentals and Mathematical Models. John Wiley, Hoboken, N.J.

Alvarez, P.J.J., Anid, P.J., Vogel, T.M., 1991. Kinetics of aerobic biodegradation of benzene and toluene in sandy aquifer material. *Biodegradation* 2, 43–51.

Alvarez, P.J.J., Cronkhite, L.A., Hunt, C., 1998. Use of benzoate to establish reactive buffer zones for enhanced attenuation of BTX migration: aquifer column experiments. *Environmental Science & Technology* 32, 509–515.

Cápiro, N.L., Stafford, B.P., Rixey, W.G., Bedient, P.B., Alvarez, P.J.J., 2007. Fuel-grade ethanol transport and impacts to groundwater in a pilot-scale aquifer tank. *Water Research* 41, 656–664.

Cápiro, N.L., Da Silva, M.L.B., Stafford, B.P., Rixey, W.G., Alvarez, P.J.J., 2008. Microbial community response to a release of neat ethanol onto residual hydrocarbons in a pilot-scale aquifer tank. *Environmental Microbiology* 10, 2236–2244.

Corseuil, H.X., Hunt, C.S., Ferreira dos Santos, R.C., Alvarez, P.J.J., 1998. The influence of the gasoline oxygenate ethanol on aerobic and anaerobic BTX biodegradation. *Water Research* 32, 2065–2072.

Corseuil, H.X., Monier, A.L., Fernandes, M., Schneider, M.R., Nunes, C.C., do Rosario, M., Alvarez, P.J.J., 2011. BTEX plume dynamics following an ethanol blend release: geochemical footprint and thermodynamic constraints on natural attenuation. *Environmental Science & Technology* 45, 3422–3429.

Coward, M.F., Jones, G.W., 1931. Limits of inflammability of gases and vapors. US Bureau of Mines Bulletin 279.

Cozzarelli, I.M., Baedeker, M.J., Eganhouse, R.P., Goerlitz, D.F., 1994. The geochemical evolution of low molecular-weight organic acids derived from the degradation of petroleum contaminants in groundwater. *Geochimica et Cosmochimica Acta* 58, 863–877.

Da Silva, M.L.B., Alvarez, P.J.J., 2002. Effects of ethanol versus MTBE on benzene, toluene, ethylbenzene, and xylene natural attenuation in aquifer columns. *Journal of Environmental Engineering* 128, 862.

Da Silva, M.L.B., Alvarez, P.J.J., 2004. Enhanced anaerobic biodegradation of benzene–toluene–ethylbenzene–xylene–ethanol mixtures in bioaugmented aquifer columns. *Applied and Environmental Microbiology* 70, 4720–4726.

Da Silva, M.L.B., Alvarez, P.J.J., 2010. Indole-based assay to assess the effect of ethanol on *Pseudomonas putida* F1 dioxygenase activity. *Biodegradation* 21, 425–430.

Domenico, P.A., Schwartz, F.W., 1997. Physical and Chemical Hydrogeology, 2nd edition. John Wiley & Sons, Inc.

Duncan, K.E., Gieg, L.M., Parisi, V.A., Tanner, R.S., Tringe, S.G., Bristow, J., Suflita, J.M., 2009. Biocorrosive thermophilic microbial communities in Alaskan North Slope oil facilities. *Environmental Science & Technology* 43, 7977–7984.

Freitas, J.G., Fletcher, B., Aravena, R., Barker, J.F., 2010. Methane production and isotopic fingerprinting in ethanol fuel contaminated sites. *Ground Water* 48, 844–857.

Gomez, D.E., Alvarez, P.J.J., 2009. Modeling the natural attenuation of benzene in groundwater impacted by ethanol-blended fuels: effect of ethanol content on the lifespan and maximum length of benzene plumes. *Water Resources Research* 45, W03409.

Gomez, D.E., Alvarez, P.J.J., 2010. Comparing the effects of various fuel alcohols on the natural attenuation of benzene plumes using a general substrate interaction model. *Journal of Contaminant Hydrology* 113, 66–76.

Gomez, D.E., de Blanc, P.C., Rixey, W.G., Bedient, P.B., Alvarez, P.J.J., 2008. Modeling benzene plume elongation mechanisms exerted by ethanol using RT3D with a general substrate interaction module. *Water Resources Research* 44, 1–12.

Heermann, S.E., Powers, S.E., 1998. Modeling the partitioning of BTEX in water-reformulated gasoline systems containing ethanol. *Journal of Contaminant Hydrology* 34, 315–341.

Jewell, K.P., Wilson, J.T., 2011. A new screening method for methane in soil gas using existing groundwater monitoring wells. *Ground Water Monitoring & Remediation* 31, 82–94.

Jones III, V.T., Agostino, P.N., 1998. Case studies of anaerobic methane generation at a variety of hydrocarbon fuel contaminated sites. *Chemicals in Ground Water: Prevention, Detection, and Remediation—November 11–13. Houston, TX.*

Lovanh, N., Alvarez, P.J.J., 2004. Effect of ethanol, acetate, and phenol on toluene degradation activity and tod–lux expression in *Pseudomonas putida* TOD102: evaluation of the metabolic flux dilution model. *Biotechnology and Bioengineering* 86, 801–808.

Lovanh, N., Hunt, C.S., Alvarez, P.J.J., 2002. Effect of ethanol on BTEX biodegradation kinetics: aerobic continuous culture experiments. *Water Research* 36, 3739–3746.

Ma, J., Xiu, Z., Monier, A., Mamonkina, I., Zhang, Y., He, Y., Stafford, B., Rixey, W., Alvarez, P.J.J., 2011. Aesthetic groundwater quality impacts from a continuous pilot-scale release of an ethanol blend. *Ground Water Monitoring & Remediation* 31 (3), 47–54.

Ma, J., Rixey, W.G., DeVaul, G.E., Stafford, B.P., Alvarez, P.J.J., 2012. Methane bioattenuation and implications for explosion risk reduction along the groundwater to soil surface pathway above a plume of dissolved ethanol. *Environmental Science & Technology* 46, 6013–6019.

- Marrin, D.L., 1989. Oil gas analysis of methane and carbon dioxide: delineating and monitoring petroleum hydrocarbons. NWWA Conference on Hydrocarbons and Organic Chemicals in Ground Water, pp. 357–367 (Houston, TX).
- McNab, W., Heermann, S.E., Dooher, B., 1999. Chapter 4: screening model evaluation of the effects of ethanol on benzene plume lengths. In: Cannon, G. (Ed.), Volume 4: "Potential Ground and Surface Water Impacts" in Health and Environmental Assessment of the Use of Ethanol as a Fuel Oxygenate, December 1999, UCRL-AR-135949: University of California, Lawrence Livermore National Laboratory, Environmental Restoration Division, Livermore, California 94550.
- Metcalfe, Eddy, 1991. Wastewater Engineering: Treatment, Disposal, and Reuse – Third Edition. McGraw-Hill, Inc.
- Molson, J.W., Barker, J.F., Frind, E.O., Schirmer, M., 2002. Modeling the impact of ethanol on the persistence of benzene in gasoline-contaminated groundwater. *Water Resources Research* 38, 1003.
- Oztürk, M., 1991. Conversion of acetate, propionate, and butyrate to methane under thermophilic conditions in batch reactors. *Water Research* 25, 1509–1513.
- Powers, S.E., Hunt, C.S., Heermann, S.E., Corseuil, H.X., Rice, D.W., Alvarez, P.J.J., 2001a. The transport and fate of ethanol and BTEX in groundwater contaminated by gasoline. *Critical Reviews in Environmental Science and Technology* 31, 79–123.
- Powers, S.E., Rice, D.W., Dooher, B., Alvarez, P.J.J., 2001b. Peer reviewed: will ethanol-blended gasoline affect groundwater quality? *Environmental Science & Technology* 35, 24A–30A.
- Rakoczy, J., Schleinitz, K.M., Müller, N., Richnow, H.H., Vogt, C., 2011. Effects of hydrogen and acetate on benzene mineralisation under sulphate-reducing conditions. *FEMS Microbiology Ecology* 77, 238–247.
- Ruiz-Aguilar, G.M.L., Fernandez-Sanchez, J.M., Kane, S.R., Kim, D., Alvarez, P.J.J., 2002. Effect of ethanol and methyl-tert-butyl ether on monoaromatic hydrocarbon biodegradation: response variability for different aquifer materials under various electron-accepting conditions. *Environmental Toxicology and Chemistry* 21, 2631–2639.
- Schnoor, J.L., 1996. Environmental Modeling: Fate and Transport of Pollutants in Water, Air, and Soil. John Wiley and Sons, Inc.
- Snoeyink, V.L., Jenkins, D., 1980. Water Chemistry. John Wiley and Sons, Inc.
- Sufliata, J.M., Phelps, T.J., Little, B., 2008. Carbon dioxide corrosion and acetate: a hypothesis on the influence of microorganisms. *Corrosion* 64, 854–859.
- U.S. Department of Energy, 2009. Ethanol market penetration [WWW document]. Alternative Fuels and Advanced Vehicles Data Center, July 10. (URL <http://www.afdc.energy.gov/afdc/ethanol/market.html>).
- U.S. Environmental Protection Agency, 2009a. National primary drinking water regulations [WWW document]. EPA 816-F-09-004. URL <http://www.epa.gov/ogwdw/consumer/pdf/mcl.pdf>.
- U.S. Environmental Protection Agency, 2009b. The clean air act [WWW document]. URL <http://www.epa.gov/air/caa/>.
- Ulrich, A.C., Edwards, E.A., 2003. Physiological and molecular characterization of anaerobic benzene-degrading mixed cultures. *Environmental Microbiology* 5, 92–102.
- United States Congress Senate, 2007. 110th Congress, 1st Session, H.R. 6, Energy Independence and Security Act of 2007. Congressional Bills. Engrossed Amendment House. Friday, December 7.
- Van Genuchten, M.T., 1985. Convective-dispersive transport of solutes involved in sequential first-order decay reactions. *Computers & Geosciences* 11, 129–147.
- von Gunten, U., Zobrist, J., 1993. Biogeochemical changes in groundwater-infiltration systems: column studies. *Geochimica et Cosmochimica Acta* 57, 3895–3906.
- Wu, M.M., Hickey, R.F., 1996. n-Propanol production during ethanol degradation using anaerobic granules. *Water Research* 30, 1686–1694.
- Wu, M.M., Hickey, R.F., Zeikus, J.G., 1991. Characterization of metabolic performance of methanogenic granules treating brewery wastewater: role of sulfate-reducing bacteria. *Applied and Environmental Microbiology* 57, 3438–3449.
- Yacobucci, B.D., 2007. Fuel Ethanol: Background and Public Policy Issues, Report RL33290. Congressional Research Service, Washington D.C.