

# Performance Analysis of Epidemic Routing under Contention \*

Apoorva Jindal  
Department of Electrical Engineering  
University of Southern California  
Los Angeles, CA 90089  
apoorvaj@usc.edu

Konstantinos Psounis  
Department of Electrical Engineering  
University of Southern California  
Los Angeles, CA 90089  
kpsounis@usc.edu

## ABSTRACT

Epidemic routing has been proposed as a robust transmission scheme for sparse mobile ad hoc networks. Under the assumption of no contention, epidemic routing has the minimum end-to-end delay amongst all the routing schemes proposed for such networks. The assumption of no contention was justified by arguing that since the network is sparse, there will be very few simultaneous transmissions. Some recent papers have shown through simulations that this argument is not correct and that contention cannot be ignored while analyzing the performance of routing schemes, even in sparse networks.

Incorporating contention in the analysis has always been a hard problem and hence its effect has been studied mostly through simulations only. In this paper, we find analytical expressions for the delay performance of epidemic routing with contention. We include all the three main manifestations of contention, namely (i) the finite bandwidth of the link which limits the number of packets two nodes can exchange, (ii) the scheduling of transmissions between nearby nodes which is needed to avoid excessive interference, and (iii) the interference from transmissions outside the scheduling area. The accuracy of the analysis is verified via simulations.

### Categories and Subject Descriptors:

C.2.2 [Computer Communication Networks]: Network Protocols- [Routing Protocols]

I.6.4 [Simulation and Modeling]: Model Validation and Analysis

**General Terms:** Performance.

**Keywords:** Delay tolerant networks, ad-hoc networks, Contention, Epidemic Routing.

---

\*This research was funded in part by NSF under grant number 0520017

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

*IWCMC'06* July 3-6, 2006, Vancouver, British Columbia, Canada  
Copyright 2006 ACM 1-59593-306-9/06/0007 ...\$5.00.

## 1. INTRODUCTION

In Delay Tolerant Mobile Networks, there does not exist a complete end-to-end path from a source to a destination. Even if such a path exists, it is highly unstable and may change or break soon after it has been discovered (or even while it is being discovered). So, the conventional mobile ad hoc routing protocols will fail to successfully route packets through such networks. The reactive schemes will fail to discover a complete path while proactive protocols will fail to converge. Examples of such networks include sensor networks for wildlife tracking and habitat monitoring [9], military networks [1], inter-planetary networks [5], nomadic communities networks [6], networks of mobile robots [18] etc.

Epidemic routing [17] was proposed as a robust routing scheme for such a network. It adopts a "store-carry-forward" paradigm: every node acts as a relay for other nodes. The algorithm is essentially flooding with some variations to reduce overhead. There has been some effort to theoretically characterize the performance of epidemic routing [7], [14], [19]. But none of these analytical works take contention into account. This is not because contention is not an important problem but because it is very hard to analyze. [11], [13], [15], [16] have taken contention into account through simulations and shown its detrimental effect on the performance.

This paper finds analytical expressions for the delay performance of epidemic routing with contention in the network. Contention manifests itself in three ways: (i) finite bandwidth, which limits the number of packets two nodes can exchange when they are within range, (ii) scheduling of transmissions between nearby nodes which is needed to avoid excessive interference, and (iii) interference from transmissions outside the scheduling area. The reason for taking finite bandwidth into account is easy to see, but taking both scheduling and interference into account might, at first glance, appear unnecessary. However, recent studies [3], [20] have shown that the circular disk model is an inaccurate channel model and multipath fading in a realistic channel can result in significant received power from transmitters which are not nearby. Hence, if a realistic fading channel model is assumed, then the interference from nodes outside the scheduling area cannot be neglected.

The outline of the paper is as follows. Section 2 presents our notation and assumptions, states some useful results for the random walk mobility model which we use during the course of the analysis and provides a brief introduction to epidemic routing principles. Section 3 finds the probability that a particular packet is successfully exchanged in spite of contention in the network. Section 4 computes the expected

delay for epidemic routing in sparse networks and verifies through simulations that the approximations made to simplify the analysis do not effect the accuracy of the analysis. Finally, Section 5 concludes our paper.

## 2. PRELIMIARIES

### 2.1 Notation and Assumptions

This section defines our model for the network.

1.  $M$  nodes perform independent random walks on a  $\sqrt{N} \times \sqrt{N}$  2-D torus.
2. Each node moves one grid unit in one time unit.
3. We use manhattan distance (L1 norm) to measure the distance between two nodes.
4. Each node acts as a source sending packets to a randomly selected destination.
5. The average number of distinct packets in the network at a given time is  $S$ .
6. Two nodes transmit to each other when the distance between them is less than  $K$ . The justification for this scheme can be found in studies which characterize the physical channel [3], [20]. If the distance between the two nodes is less than  $K$  (whose actual value depends on the transmitted power), then the packet reception rate is nearly one, that is the probability that a packet is received in error is nearly zero. (This is called the connected region.)  
Note that this does not imply that transmissions from nodes at a distance greater than  $K$  are not going to interfere with the ongoing transmission.
7. The signal to interference ratio should be greater than a desired threshold, which we call  $\Theta$ , for the transmission to be successful.
8. We assume a Rayleigh-Rayleigh fading model (both the desired and the interfering signals are Rayleigh distributed).

### 2.2 Useful Results for Random Walk Mobility Model

This section presents results on random walks which we use during the analysis.

Let  $ET_j$  denote the expected hitting time until a walk starting from the stationary distribution reaches  $j$ . On a symmetric graph, this quantity is independent of  $j$ , and we denote it as  $ET$ . Let  $EM$  denote the expected time until two independent random walks, starting from the stationary distribution, first meet each other. The following lemma states a number of properties of these quantities.

LEMMA 2.1. *Let independent random walks be performed on a  $\sqrt{N} \times \sqrt{N}$  torus. Then,*

- (i) *The steady state distribution of the location of each walk is uniform.*
- (ii)  *$ET = cN \log N$ , where  $c = 0.34$ . In theory, this result is valid as  $N \rightarrow \infty$ . However, the result is quite accurate for  $N > 25$  [2], [4].*

$$(iii) \quad EM = \frac{1}{2}ET.$$

- (iv) *The tail of the distribution of the hitting times is exponentially distributed.*

*Proof:* See [4].  $\square$

The above lemma computes the meeting times when the transmission range is zero ( $K = 0$ ). The following lemma extends the previous lemma when  $K \geq 0$ .

LEMMA 2.2. *For  $K \geq 0$ ,*

$$ET = N \left( c \log N - \frac{2^{K+1} - K - 2}{2^{K+1}} \right), \\ EM = \frac{1}{2}ET.$$

*Proof:* See [14].  $\square$

[4] shows that it is the tails of the distribution of the hitting and meeting times that are exponential. In this paper, we assume that the distribution is itself exponential. According to [7], this is a good approximation for small to moderate  $K$  with respect to the total area. Since we are assuming a sparse network (where  $K \ll N$ ), this approximation does not have a significant impact on the accuracy of the analysis.

$EM^+$  denotes the expected intermeeting time which is the expected time for two walks to meet if they started from within range of each other. Lemma 2.3 states its value.

LEMMA 2.3.

$$EM^+ = \frac{N}{2} \left( \frac{2^{K+1} - K - 2}{2^{K+1}} \right) \left( \frac{1}{2^{K+1}} \right) \\ \left( 4K - (2K + 1) - \left( \frac{1 + l_K - 1}{1 + l_K} (2K - 1) \right) \right),$$

where  $l_K = 1 + \sum_{t=1}^{K-1} \prod_{r=1}^t \frac{q_r}{p_r}$  and  $p_r = \frac{2r+1}{4r}$ ,  $q_r = \frac{2r-1}{4r}$ .

*Sketch of Proof:* To derive  $EM^+$ , we need to take into account that if the two nodes do not meet again until one mixing time (the time after which the walks reach their stationary distribution), the extra time they take to meet is  $EM$ . The proof is omitted here due to limitations of space. The interested reader may refer to [8].  $\square$

### 2.3 Epidemic Routing

This section summarizes the basic epidemic routing principles [17]. Each node stores and forwards packets destined for other nodes. Each node maintains a summary vector that indicates the set of packets which it has. When two nodes come within transmission range of each other, they first exchange their summary vectors. Next, based on this information, they exchange packets which they don't have. Thus, the source node copies the packet to every node it meets, and each node in turn forwards the copy to every other node it meets. The packet is delivered when the first node carrying a copy of the packet meets the destination. But, the packet will continue to get copied from one node to the other until all the nodes have a copy of the packet or its TTL expires. We assume that the TTL of the packet is large enough to ensure that all packets are delivered to the destination, that is, there is no packet loss due to TTL expiry.

## 3. CONTENTION ANALYSIS

First we identify the three manifestations of contention;

**Finite Bandwidth:** When two nodes meet, they might have more than one packet to exchange. We assume that two nodes can exchange only one packet in one

time unit. They will have to wait until they meet again to transfer more packets.

The number of packets which can be exchanged in a time unit is a function of the packet size and the bandwidth of the links. The following analysis is easily modified if more than one packet can be exchanged in a time unit.

**Scheduling:** We assume a scheduling mechanism is in place which ensures that no two transmitters are within a distance of  $2K$  to each other. This scheduling mechanism is very similar to the CSMA-CA algorithm.

**Interference:** Even though the scheduling mechanism is ensuring that no simultaneous transmissions are taking place within a distance  $2K$  of each other, there is no restriction on simultaneous transmissions taking place separated by a distance more than  $2K$ . These transmissions will interfere with each other which can lead to packet loss.

Lets look at a particular packet, label it *Packet A*. Two nodes,  $i$  and  $j$  at a distance  $k \leq K$  from each other, want to exchange Packet A. Let  $p_{txS}(k)$  define the probability that they will successfully exchange Packet A.

Let there be  $s$  other packets (other than Packet A) which  $i$  and  $j$  want to exchange,  $0 \leq s \leq S - 1$  (a packet will be exchanged if and only if one of the nodes has a copy of the packet and the other one doesn't). We label this event as  $T_s$ . The packet exchanged is randomly selected from amongst these  $s + 1$  packets.

Let there be  $a$  nodes within a distance  $2K$  of the transmitting node (label it event  $E_a$ ) and let there be  $c$  nodes in the  $2K < d \leq 3K$  ring (label it event  $E_c$ ) from the transmitter. The nodes in the  $2K < d \leq 3K$  ring have to be accounted for because a node at the edge of the  $2K$  circle can be within the transmission range of these nodes and will contend with the desired transmitter. Let  $t(a, c)$  denote the number of possible transmissions whose transmitter lies within  $2K$  distance of the desired transmitter. The scheduling mechanism will allow transmission between  $i$  and  $j$  w.p.  $1/t(a, c)$ .

There are  $M - a$  nodes outside the  $2K$  range from the transmitter. If two of these nodes are within the transmission range of each other, then they can exchange packets causing interference with the transmission between  $i$  and  $j$ . Lets label the event that the packet between  $i$  and  $j$  is successfully exchanged inspite of the interference caused by these  $M - a$  nodes as  $E_{M-a}$ .

Then,

$$p_{txS}(k) = \left( \sum_{s=0}^{S-1} \frac{1}{s+1} P(T_s) \right) \times \left( \sum_{a,c} \frac{1}{t(a,c)} P(E_a) P(E_c | E_a) P(E_{M-a}) \right). \quad (1)$$

Equation (1) separates out the effect of each of the factors on  $p_{txS}(k)$ . Next, we find expressions for the unknown values in Equation (1).

### 3.1 Finite Bandwidth

In this section, we figure out the probability that nodes  $i$  and  $j$  have  $s$  other packets to exchange.

LEMMA 3.1.  $P(T_s) = \binom{S-1}{s} (p_{exB})^s (1 - p_{exB})^{S-s-1}$ , where  $p_{exB} = \sum_{m=1}^{M-1} \frac{2m(M-m)}{M(M-1)} \frac{E(d(m))}{\sum_{l=1}^{M-1} E(d(l))}$  and  $d(m)$  is

the time it takes for the copies of a packet in the network to increase from  $m$  to  $m + 1$ , and  $E(d(m))$  is its expected value.

*Sketch of Proof:*  $p_{exB} = \Pr(\text{nodes } i \text{ and } j \text{ want to exchange a particular packet B})$ . Nodes  $i$  and  $j$  will try to exchange packet B only if either  $i$  has it and  $j$  doesn't or vice versa. Since there are  $S - 1$  packets other than packet A in the network,  $P(T_s) = \binom{S-1}{s} (p_{exB})^s (1 - p_{exB})^{S-s-1}$ .

The calculation of  $p_{exB}$  hinges on the following two facts:

1. The probability that there are  $m$  copies of a packet in the network is equal to the (expected amount of time there are  $m$  copies of the packet in the network)/(expected total time the packet spends in the network before being removed).
2. Given that there are  $m$  copies of packet B in the network, the probability that node  $i$  has the packet and  $j$  doesn't is equal to  $\frac{m(M-m)}{M(M-1)}$ .

The expression for  $p_{exB}$  can now be easily derived by using the Law of Total Probability. The proof is omitted here due to limitations of space. The interested reader may refer to [8].  $\square$

In the subsequent analysis, we will assume that when two nodes meet, the probability that they have no packet to exchange ( $= (1 - p_{exB})^S$ ) is negligible. This is a valid assumption if the traffic load is not very low. Since contention will occur only when the traffic load is not very low, this is a valid assumption to make while studying contention.

### 3.2 Scheduling

Each of the other  $M - 2$  nodes (other than  $i$  and  $j$ ) are equally likely to be at any of the  $N$  grid points because the random walk mobility model has a uniform stationary distribution. So, we use geometric arguments to figure out how many transmissions does the transmission between  $i$  and  $j$  contend with.

LEMMA 3.2.  $P(E_a) = \binom{M-2}{a-2} (p_1)^{a-2} (1-p_1)^{M-a}$  where  $p_1 = \frac{1+4K(2K+1)}{N}$ .

*Proof:* The node is equally likely to be at any of the  $N$  grid points. Consequently,  $p_1 = P(\text{there is one node within a distance } 2K \text{ of the transmitting node}) = (\text{number of grid points within distance } 2K) / (\text{total number of grid points}) = \frac{1 + \sum_{r=1}^{2K} 4r}{N} = \frac{1+4K(2K+1)}{N}$ . Recall that two nodes,  $i$  and  $j$ , are already within  $K$  distance of the transmitter. So,  $P(E_a) = \binom{M-2}{a-2} (p_1)^{a-2} (1-p_1)^{M-a}$ .  $\square$

COROLLARY 3.1.  $P(E_c | E_a) = \binom{M-a}{c} (p_2)^c (1-p_2)^{M-a-c}$  where  $p_2 = \frac{2(5K^2+K)}{N}$ .

*Proof:*  $p_2 = P(\text{there is one node within the } 2K < d \leq 3K \text{ ring from the transmitter}) = (\text{number of grid points in the } 2K < d \leq 3K \text{ ring}) / (\text{total number of grid points}) = \frac{2(5K^2+K)}{N}$ . The probability that  $c$  nodes out of the  $M - a$  nodes are in the  $2K < d \leq 3K$  ring is equal to  $\binom{M-a}{c} (p_2)^c (1-p_2)^{M-a-c}$ .  $\square$

LEMMA 3.3.  $t(a, c) = \left(1 + p_a \left(\binom{a}{2} - 1\right)\right) + \left(\frac{acp_c}{2}\right)$   
where  $p_a = \frac{1}{16} + \frac{A}{4\pi K^2}$ ,  $p_c = \frac{3}{20} - \frac{A}{5\pi K^2}$  and  
 $A = \int_K^{2K} \frac{x}{2K^2} [K^2 \cos^{-1} \left(\frac{x^2 - 3K^2}{2Kx}\right) + 4K^2 \cos^{-1} \left(\frac{x^2 + 3K^2}{4Kx}\right) - \frac{1}{2} \sqrt{(x^2 - K^2)(9K^2 - x^2)}] dx$ .

*Sketch of Proof:* To prove the lemma, we use geometric arguments and simple combinatorics to find the expected number of transmitters in the  $2K$  ring given there are  $a$  nodes within the  $2K$  ring and  $c$  nodes in the  $2K$  to  $3K$  ring. The proof is omitted here due to limitations of space. The interested reader may refer to [8].  $\square$

### 3.3 Interference

The interference caused by other nodes depend on the number of simultaneous transmissions and the distance between these transmitters and the desired receiver. Both these quantities are not deterministic, and hence we use the Law of Total Probability to find  $P(E_{M-a})$ .

Given that there are  $M - a$  nodes outside the scheduling area (event  $E_a$ ), let there be  $x$  interfering transmissions at a distance of  $d_1, d_2, \dots, d_x$  from the desired transmitter. Then,

$$P(E_{M-a}) = \sum_x \sum_{d_1, d_2, \dots, d_x} P(E_{M-a} | x, d_1, d_2, \dots, d_x) P(d_1, d_2, \dots, d_x | x) P(x). \quad (2)$$

It is possible to calculate both  $P(x)$  and  $P(d_1, d_2, \dots, d_x | x)$  to substitute in Equation (2), but, the resulting expressions will be very complicated. So, we will replace  $x$  and the  $d_i$ 's with their expected values in the expression for  $P(E_{M-a})$ .

Since each node is moving independently of each other,  $E[d_1] = E[d_2] = \dots = d_{avg}$ . We label  $E[x]$  as  $\bar{x}$ .

First, we figure out  $d_{avg}$ . Let  $P(d)$  denote the probability that the distance between any two nodes on the grid equals  $d$ . Then,

$$P(d) = \begin{cases} 1/N & d = 0 \\ 4d/N & 1 \leq d < n/2 \\ 2(n-1)/N & d = n/2 \\ 4(n-d)/N & n/2 < d < n \\ 1/N & d = n \end{cases}.$$

Hence,  $d_{avg} = E[\text{distance between two simultaneous transmissions}] = \sum_{d=2K+1}^n d \times P(d)$  which can be computed using algebra.

Next, we figure out  $\bar{x} = E[x]$ .

Lets define  $p_m$  to be the probability that two nodes meet. Then,  $p_m$  is just the inverse of the intermeeting time, that is,  $p_m = \frac{1}{EM^+}$ . There are  $\binom{M-a}{2}$  possible pairs of nodes. Hence, the expected number of interfering transmissions =  $\bar{x} = p_m \binom{M-a}{2}$ .

LEMMA 3.4.  $P(E_{M-a}) \approx \left(\frac{1}{1 + \frac{\bar{x}k^2}{d_{avg}^2}}\right)^{\bar{x}}$ , where  $k$  is the distance between nodes  $i$  and  $j$ .

*Sketch of Proof:*  $P(E_{M-a} | x, d_1, d_2, \dots, d_x)$  is the complement of the outage probability. Kandukuri et al [10] evaluated the outage probability for the Rayleigh-Rayleigh fading channel. The lemma directly follows from their result. The proof is omitted here due to limitations of space. The interested reader may refer to [8].  $\square$

Note that the preceding analysis neglects the interference due to transmissions between a node outside the  $2K$  circular region and a node inside it. Since the number of such transmissions are very few in number as compared to the other transmissions, even though they are closer than other transmissions, their effect on interference is negligible.

Now, we have all the components to put together to find  $p_{txs}(k)$  in Equation (1).

## 4. DELAY ANALYSIS OF EPIDEMIC ROUTING FOR SPARSE NETWORKS

A number of papers [7], [14], [19] have analyzed epidemic routing but none of them take contention into account. These papers argue that since the network is pretty sparse, there won't be a lot of contention in the first place and hence, nothing much is lost by analyzing the protocol without taking contention into account. [11], [15], [16] have shown through simulations that this assumption is not valid and contention has a significant impact on system performance. Hence, any analysis that does not take contention into account will be inaccurate.

### 4.1 Delay Analysis

We first derive an expression for  $E(d(m))$  which is the expected time it takes for the copies of a packet in the network to increase from  $m$  to  $m + 1$ . (We define the  $m^{th}$  time epoch as the duration during which there are  $m$  copies of the packet in the network.)

Two nodes can start talking as soon as they come within  $K$  distance of each other. If the first exchange of the given packet is unsuccessful, then in the next time step, either the nodes might move away from each other, in which case they will wait for another intermeeting time, or else they might remain in contact with each other, in which case they have another chance to exchange the packet. In the second case, they will keep on trying until either they successfully exchange the packet or they move out of range of each other. Let  $p_{success}$  denote the probability that the nodes successfully exchange the given packet before going out of range of each other.

When the packet is generated at the source, the source node can be uniformly distributed anywhere on the 2-D torus. So, the expected time to meet another node is equal to  $EM$ , the expected meeting time. Now, if the source meets another node and is unable to successfully exchange the given packet, then the expected time till it meets this node again is equal to  $EM^+$ , the intermeeting time. Consequently at the start of each time epoch, there will be certain pair of nodes whose expected time to meet is  $EM$  and for the other pairs, it will be  $EM^+$ . This number will have to be tracked as time evolves to find  $E(d(m))$ .

LEMMA 4.1.

$$E(d(m)) = \sum_{k=1}^{q_2^m} \left( \frac{1}{\frac{(1-p_{success})(q_2^m - k)}{EM} + p_{success} \left( \frac{q_1^m + k}{EM^+} + \frac{q_2^m - k}{EM} \right)} \right) \left( \prod_{l=0}^{k-1} \frac{(1-p_{success})(q_2^m - l)}{EM} + p_{success} \left( \frac{q_1^m + l}{EM^+} + \frac{q_2^m - l}{EM} \right) \right) \quad (3)$$

where  $q_1^m = (m-1)(M-m)$  and  $q_2^m = (M-m)$ .


*Proof:* We first derive  $E(d(m))$  as a function of  $p_{success}$  and then compute  $p_{success}$ .

When there are  $m$  copies of a packet in the network, if any of the nodes that carry one of these copies meet any of

the other  $M - m$  nodes, a packet exchange is possible. The packet exchange will take place successfully with probability  $p_{success}$ . The  $m^{th}$  time epoch starts when a transmission occurs that increases the number of copies of the packet to  $m$ . The new node can now exchange the packet with the rest of the  $M - m$  nodes. When this new node receives the packet, it can be anywhere on the 2-D torus with the same probability. Hence, the meeting time for these new  $M - m$  pairs is exponentially distributed with mean  $EM$ . The rest of the  $(m - 1)(M - m)$  pairs are carried forward from the previous time epochs. Depending on whether these pairs have met or not in the previous time epochs, some of these will have exponential meeting times with mean  $EM$  (implying they have not met before in any of the previous time epochs) and the rest will have exponential meeting times with mean  $EM^+$  (implying they have met at least once in some previous time epoch). We assume that all these  $(m - 1)(M - m)$  pairs have met at least once in some previous time epoch, that is, their expected meeting times are equal to  $EM^+$ . This is a valid assumption if there is significant contention in the network and the value of  $p_{success}$  is small. Since epidemic routing is a flooding based protocol, there is enough contention in the network to make the assumption accurate.

Let  $q1_m$  and  $q2_m$  denote the number of pairs, at the start of the  $m^{th}$  time epoch, whose meeting times are exponential with means  $EM^+$  and  $EM$  respectively. Then,  $q1_m = (m - 1)(M - m)$  and  $q2_m = (M - m)$ .

For the  $m^{th}$  time epoch, the set of states (number of pairs with meeting time exponential with mean  $EM^+$ , number of pairs with meeting time exponential with mean  $EM$ ) along with a state TS (transmission successful) (jumping to this state denotes the end of the time epoch) form a continuous time Markov chain.

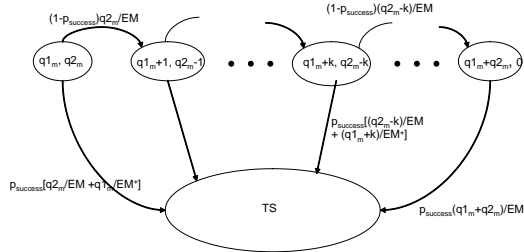

**Figure 1: The Markov chain describing the evolution of (number of pairs with expected meeting times =  $EM$ , number of pairs with expected meeting times =  $EM^+$ ) when there are  $m$  copies of the packet in the network.**

The CTMC is shown in Figure 1.  $E(d(m))$  is equal to the expected time it takes the Markov chain to end up in the TS state. Solving the Markov chain using standard Markov chain theory [12] gives the desired result.

To complete the derivation, we now derive  $p_{success}$ . Two nodes meet if they come within a distance  $K$  of each other. If the packet exchange is unsuccessful, then the two nodes will both move before trying to transmit again. This can be modeled as if one node does not move and the other node moves two steps before another transmission is attempted. These attempted transmissions will have to be tracked to find  $p_{success}$ .

Let  $p_k$  denote the probability that the two nodes move out of range of each other without being able to exchange

the packet given that the current distance between them is  $k \leq K$ . Then,

$$p_k = \begin{cases} (1 - p_{txS}(k)) \left( \frac{2k+1}{4k} p_{k+1} + \frac{2k-1}{4k} p_{k-1} \right) & K - k \text{ is even} \\ \left( \frac{2k+1}{4k} p_{k+1} + \frac{2k-1}{4k} p_{k-1} \right) & K - k \text{ is odd,} \end{cases} \quad (4)$$

where  $p_{txS}(k)$  is the probability that they successfully exchange the given packet if the distance between them is  $k$  (its value was derived in Section 3 (see Equation (1))).

The boundary conditions are,

$$p_0 = \begin{cases} (1 - p_{txS}(0)) p_1 & K \text{ is even} \\ p_1 & K \text{ is odd,} \end{cases}$$

and  $p_{K+1} = 1$ .

After the first unsuccessful exchange, the two nodes move within a distance  $K - 1$  with probability  $\frac{2K-1}{4K}$  or move to a distance  $K + 1$  with probability  $\frac{2K+1}{4K}$ . Hence,

$$p_{success} = 1 - \left( (1 - p_{txS}(K)) \left( \frac{2K+1}{4K} + \left( p_{K-1} \frac{2K-1}{4K} \right) \right) \right). \quad (5)$$

$p_{K-1}$  can be evaluated by solving the linear set of Equations (4) and then  $p_{success}$  can be evaluated using Equation (5).  $\square$

The value of  $E(d(m))$  depends on  $p_{success}$  which in turn depends on  $p_{txS}(k)$  whose value depends on  $E(d(m))$  (through Lemma (3.1)). Since the functions defining these dependencies are not straightforward (for example  $p_{success}$  depends on  $p(k)$  through the linear set of Equations (4)), we recursively solve for  $E(d(m))$ . The recursive algorithm is as follows:

1. First assume  $p(k)^0 = 1 \forall k$ , where the superscript represents the iteration number in the recursion.
2. Lemma 4.2 below determines the value of  $E(d(m))^0$  for  $p(k) = 1$ .
3. Using  $E(d(m))^{l-1}$ , determine  $p(k)^l$ .
4. Determine  $E(d(m))^l$  using  $p(k)^l$ .
5. If the change in the value of  $\sum_{m=1}^{M-1} E(d(m))^l$  is less than 5% in the  $l^{th}$  iteration, stop else goto Step 3.

In all the cases that we studied, the recursive loop always converged after 4 iterations.

As mentioned above, the recursive algorithm requires the value of  $E(d(m))$  for  $p(k) = 1$  at the second step. The following lemma states its value.

LEMMA 4.2. For  $p(k) = 1 \forall k$ ,

$$E(d(m)) = \frac{EM}{m(M - m)}$$

*Proof:* See [14].


Now we derive an analytical expression for the delivery delay of epidemic routing.

THEOREM 4.1. Let  $ED$  denote the expected delay until a packet is delivered to its destination. Then,


$$ED = \sum_{i=1}^{M-1} \frac{1}{M-1} \sum_{m=1}^i E(d(m)). \quad (6)$$

*Proof:* At the start of the  $m^{th}$  time epoch,  $m$  of the  $M$  nodes have the packet. When one of the remaining  $M - m$  nodes gets the packet, the copies of the packet increase to  $m + 1$

and the  $m^{\text{th}}$  time epoch ends. Since the destination was chosen randomly, it is equally likely to obtain a copy of the packet at the end of any of the  $1 \leq m \leq M-1$  time epochs. Consequently,  $ED = \sum_{i=1}^{M-1} \frac{1}{M-1} \sum_{m=1}^i E(d(m))$ .  $\square$

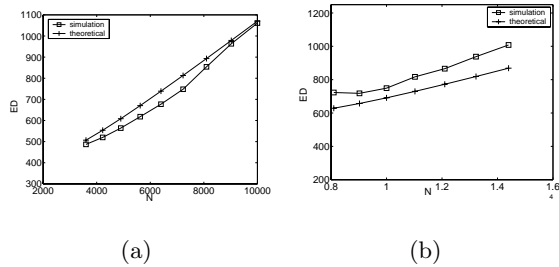

**Figure 2: Analysis vs Simulation: Delay vs  $N$  for  $M = 100$ (a)  $K = 2, \Theta = 4$  (b)  $K = 4, \Theta = 6$ .**

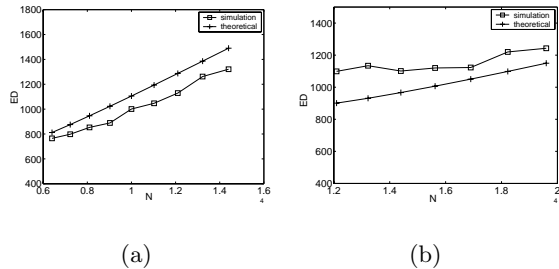

**Figure 3: Analysis vs Simulation: Delay vs  $N$  for  $M = 150$ (a)  $K = 2, \Theta = 4$  (b)  $K = 4, \Theta = 6$ .**

## 4.2 How accurate are the approximations

Some approximations were made during the course of the analysis to keep it tractable. Since all the approximations were easily justifiable, we do not expect that they would drastically effect the accuracy of the analysis. To validate our claim, we use simulations to evaluate their effect on the accuracy of the analysis.

A simulator written in C++ is used to evaluate the performance of epidemic routing. The simulator allows the user to choose from different physical layers and mobility models, simulates MAC layer collision avoidance and allows the user to build any routing scheme on top of it. We simulate epidemic routing with Rayleigh fading channel and random walk mobility model. The scheduling scheme disallows any other transmission upto two hops from the transmitter.

In this section, we plot the theoretical results against the simulation results for some representative cases. Figures 2-3 plot  $ED$  against  $N$  for different values of  $M$ ,  $K$  and  $\Theta$ . In all the plots, we assume that the average number of distinct packets in the network at a given snapshot in time is equal to the number of nodes, that is  $S = M$ . We choose this value because this is the highest value  $S$  can have without making the system unstable: as soon as a distinct packet is serviced, that is, everybody has a copy of it, a new distinct packet is introduced. Clearly, choosing the highest possible value of  $S$  will create the worst-case contention.

Since both the curves in all the figures are close to each other, we can conclude that the analysis is fairly accurate.

## 5. CONCLUSIONS

The paper provides analytical expressions for the delay performance of epidemic routing under contention. All three

manifestations of contention, finite bandwidth, scheduling and interference are incorporated in the analysis. Simulations are used to verify that the approximations made to simplify the analysis do not have a significant effect on the accuracy of the analysis.

## 6. REFERENCES

- [1] Disruption tolerant networking. <http://www.darpa.mil/ato/solicit/DTN/>.
- [2] Torus hitting times and green's functions. <http://www.math.tamu.edu/rellis/comb/torus/torus.html>.
- [3] D. Aguayo, J. Bicket, S. Biswas, G. Judd, and R. Morris. Link-level measurements from an 802.11b mesh network. In *Proceedings of ACM Sigcomm*, 2004.
- [4] D. Aldous and J. Fill. Reversible markov chains and random walks on graphs. (monograph in preparation.). <http://stat-www.berkeley.edu/users/aldous/RWG/book.html>.
- [5] S. Burleigh, A. Hooke, L. Torgerson, K. Fall, V. Cerf, B. Durst, and K. Scott. Delay-tolerant networking: an approach to interplanetary internet. *IEEE Communications Magazine*, 41, 2003.
- [6] A. Doria, M. Udn, and D. P. Pandey. Providing connectivity to the saami nomadic community. In *Proc. 2nd Int. Conf. on Open Collaborative Design for Sustainable Innovation*, Dec. 2002.
- [7] R. Groenevelt, P. Nain, and G. Koole. The message delay in mobile ad hoc networks. In *Performance*, 2005.
- [8] A. Jindal and K. Psounis. Performance analysis of epidemic routing under contention. Technical Report CENG-2006-2, USC, 2006.
- [9] P. Juang, H. Oki, Y. Wang, M. Martonosi, L. S. Peh, and D. Rubenstein. Energy-efficient computing for wildlife tracking: design tradeoffs and early experiences with zebnet. In *Proceedings of ACM ASPLOS*, 2002.
- [10] S. Kandukuri and S. Boyd. Optimal power control in interference-limited fading wireless channels with outage-probability specifications. *IEEE Transactions on Wireless Communications*, 1, Jan. 2002.
- [11] A. Lindgren, A. Doria, and O. Schelen. Probabilistic routing in intermittently connected networks. *SIGMOBILE Mobile Computing and Communication Review*, 7(3), 2003.
- [12] S. Ross. *Introduction to Probability Models*. Academic Press, 8 edition, 2002.
- [13] T. Spyropoulos, K. Psounis, and C. S. Raghavendra. Multiple-copy routing in intermittently connected mobile networks. Technical Report CENG-2004-12, USC, 2004.
- [14] T. Spyropoulos, K. Psounis, and C. S. Raghavendra. Single-copy routing in intermittently connected mobile networks. In *Proceedings of IEEE SECON*, 2004.
- [15] T. Spyropoulos, K. Psounis, and C. S. Raghavendra. Spray and wait: Efficient routing in intermittently connected mobile networks. In *Proceedings of ACM SIGCOMM workshop on Delay Tolerant Networking (WDTN)*, 2005.
- [16] Y.-C. Tseng, S.-Y. Ni, Y.-S. Chen, and J.-P. Sheu. The broadcast storm problem in a mobile ad hoc network. *Wireless Networks*, 8(2/3), 2002.
- [17] A. Vahdat and D. Becker. Epidemic routing for partially connected ad hoc networks. Technical Report CS-200006, Duke University, Apr. 2000.
- [18] A. F. Winfield. Distributed sensing and data collection via broken ad hoc wireless connected networks of mobile robots. *Distributed Autonomous Robotic Systems*, pages 273–282, 2000.
- [19] X. Zhang, G. Neglia, J. Kurose, and D. Towsley. Performance modeling of epidemic routing. Technical Report CMPSCI 05-44, Umass, 2005.
- [20] M. Zuniga and B. Krishnamachari. Analyzing the transitional region in low power wireless links. In *Proceedings of IEEE SECON*, 2004.